



QP154SX

Features

- Five year pump warranty
- Lightweight, portable
- Fast self priming from 8 metres
- Replaceable suction cover and discharge elbow (not QP1)
- QP154 series discharge can be rotated
- Honda GX petrol engines
- Skids with rubber feet and carry handle
- High Head on all models
- Robust open impeller
- Free strainer and coupling kit
- QP154SX kit includes a free 1" reducer to enable it to be used with 1" hose

Specifications

Model	Engine	Type	HP	Max Head (m)	Max Flow (lpm)	Suction port	Discharge port	Self primes to (m)	Weight (kg)	Dimensions (WxHxD)
QP1/GX25	Honda	4 Stroke Petrol	1	40	120	1"	1"	7.5	5.3	212x290x316
QP154SX GXH50	Honda	4 Stroke Petrol	2.5	60	210	1.5"	1.5"	8	9.8	274x375x398

Product Description:

Aussie "Ultralite" lightweight 1" and 1½" pumps are designed to be portable and effective. They offer flows to 210 litres per minute and maximum heads of up to 60 metres. They use lightweight, high speed, top quality engines to provide exceptional efficiency right through the performance range. Only genuine Honda engines are used (backed by a 3 year Honda GX engine warranty).

Applications:

- Water transfer
- Diesel fuel transfer (Nitrile seals standard)
- Mop up/fire fighting
- Irrigation
- Spraying

Benefits

- » Great quality ... use with confidence
- » Units weigh from only 5.3 kgs
- » Ready to pump in minimum amount of time
- » Easily replaced if thread damaged, easy to service check valve without dismantling pump
- » Bi-directional outlets provides convenience
- » Tried and proven with established service networks throughout the world
- » Feet absorb vibration - stable in operation
- » Can be used to transfer water or for mop up fire fighting duties
- » Passes small solids in suspension
- » Convenience ... cost saving
- » Makes pump adaptable



Standard Accessories:

- Handle
- Coupling Kit
- Strainer

Optional Accessories:

- Heavy duty suction hose 38mm (1.5")
- Medium pressure lay-flat hose, 100 psi working pressure
- High flow aluminium diesel transfer fuel nozzle
- High Flow fuel meter
- Diesel compatible fuel transfer hose 25mm (1")
- Fire fighting nozzles




Due to our program of continuous product development the manufacturer reserves the right to alter specifications without notice.

FIVE YEAR PUMP END WARRANTY ON ALL AUSSIE QUIK PRIME PUMPS

Construction:

Front case	Marine grade aluminium
Volute	Marine grade aluminium
Back plate	Marine grade aluminium
Mechanical seal	Carbon/ceramic
Outlet	Marine grade aluminium
Casing bolts	Zinc plated steel
Check valve	Nitrile rubber
Priming & drain plugs	Polycarbonate
Casing, priming & drain plug orings	Nitrile rubber
Finish	Brushed aluminium
Impeller	Marine grade aluminium, closed type

Dimensions:

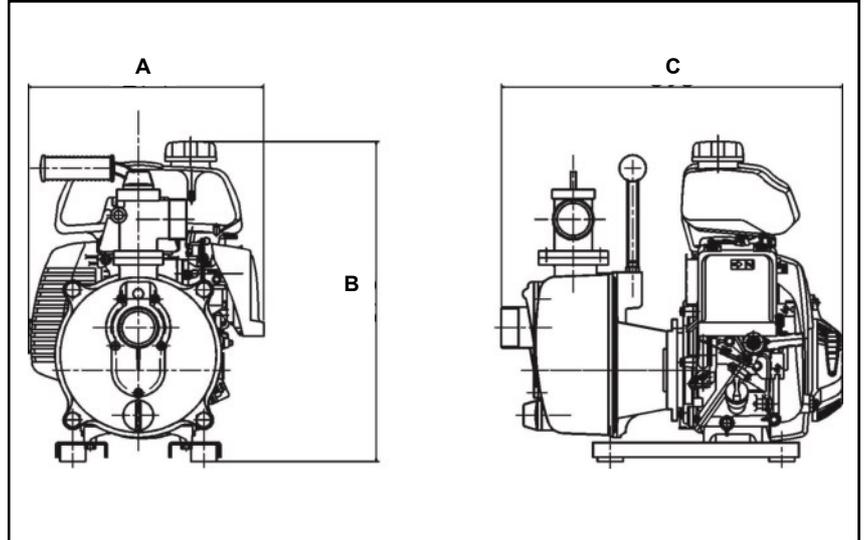


Model	A (mm)	B (mm)	C (mm)	Weight (kg)
QP1/GX25	212	290	316	5.3
QP154SX GXH50	274	375	398	9.8



QP1 GX25

Performance

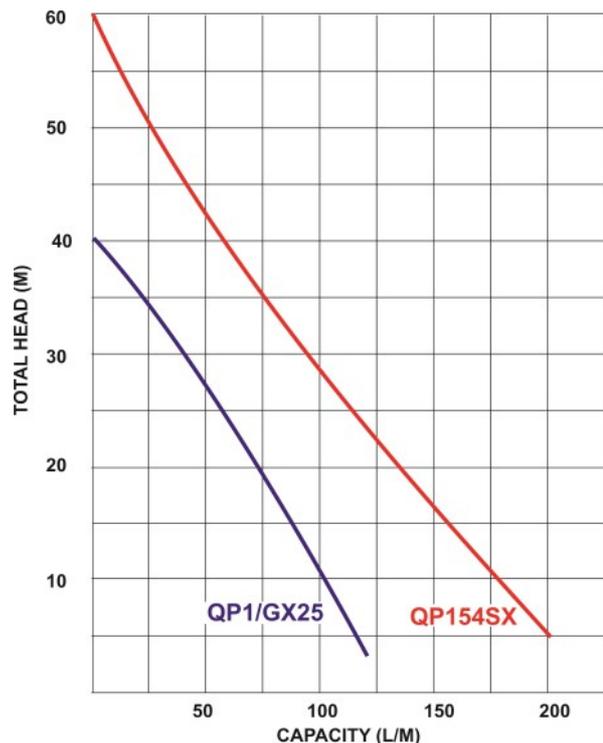

Due to our program of continuous product development the manufacturer reserves the right to alter specifications without notice.